

SRx5

540W Power Amplifier
Five Channel Power Amplifier with crossover



Power Supply

Power supply voltage:	11 ÷ 15 VDC
Idling current:	1 A
Idling current when off:	0.02 mA
Consumption @ 14.4 VDC (Max Musical Power):	37 A

Amplifier stage

Distortion Front, Rear Ch - THD (1 kHz @ 4Ω):	0.07 %
Distortion Sub Ch - THD (100 kHz @ 4Ω):	0.03 %
Bandwidth Front, Rear Ch (-3 dB):	5 ÷ 50k Hz
Bandwidth Sub Ch (-3 dB):	5 ÷ 500 Hz
S/N ratio (A weighted @ 1 V):	98 dB
Damping factor Front, Rear Ch (1 kHz @ 4Ω):	100
Damping factor Sub Ch (100 Hz @ 4Ω):	500
Pre-In sensitivity:	0.3 ÷ 5 V
Speaker-In sensitivity:	1 ÷ 15 V
Pre-In impedance:	15 kΩ
Speaker-In impedance:	100 Ω
Load impedance (MIN):	
• 5 Ch	4 x 2 Ω + 1 x 2 Ω
• 3 Ch	2 x 4 Ω + 1 x 2 Ω

OUTPUT POWER (RMS) @ 14.4 VDC, THD 1%:


• 5 Ch	55Wx4 (4Ω) + 185Wx1 (4Ω)
• 5 Ch	75Wx4 (2Ω) + 160Wx1 (4Ω)
• 5 Ch	50Wx4 (4Ω) + 300Wx1 (2Ω)
• 5 Ch	70Wx4 (2Ω) + 260Wx1 (2Ω)
• 3 Ch	150Wx2 (4Ω) + 160Wx1 (4Ω)
• 3 Ch	140Wx2 (4Ω) + 260Wx1 (2Ω)

CEA 2006-A RATINGS

OUTPUT Power (4Ω, ≤1% THD+N, 14.4 Volts): 53Wx4 Ch + 175Wx1 Ch
S/N ratio (ref. 1W output):
53 W Channels: 83 dBA
175 W Channel: 80 dBA



- PRE-OUT pass-through from high level SPEAKERS-IN input
- Fully by-passable crossover FILTERS
- Removable panel to conceal and protect controls and wiring
- Solid aluminium heatsink construction
- Fanless convection cooling system
- Power transistors fixed with spiral springs, providing a 50% increase in pressure
- Built in SUBWOOFER volume control module, requires only the connection of optional VCRA controller
- Electronic thermal control system rolls back output power in two levels (-1,5dB / 65°C; -3dB / 75°C)
- Fuse located on the control panel for easy replacement
- Connections:
 - Power supply terminal accepts 7 mm diameter (4 AWG) cable
 - Speaker terminal accepts 4.5 mm diameter (8 AWG) cables
 - Hi Level speaker and remote turn-on terminals equipped with removable connectors with screw fastening
- Subwoofer section stable into 2 Ohm loads, delivering over 300 watts
- Dual range high-pass filter (50Hz÷500Hz / 500Hz÷5kHz) for multi-channel configurations

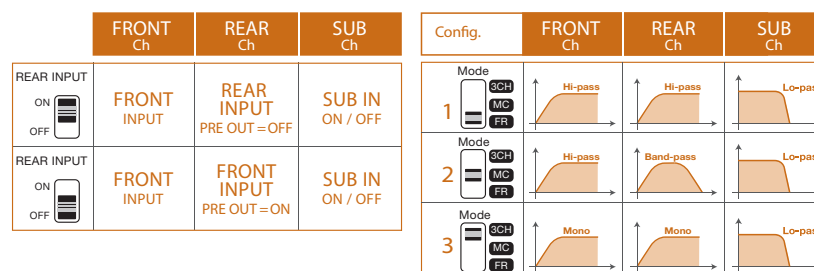

Other functions

Remote In:	7 ÷ 15 VDC (1 mA)
Remote Out :	12 VDC (15 mA)
Fuse (AFS):	40 A
REMOTE Adjustment:	- ∞ ÷ +6 dB

Inputs/Outputs

Input	Pre / Speaker
Output	Pre

Filters

FRONT Ch	Bypass / Hi-pass: 50 ÷ 5k Hz @ 12 dB/Oct.
REAR Ch	Bypass / Hi-pass / Band pass: 50 ÷ 5k Hz @ 12 dB/Oct.
SUB Ch	Bypass / Lo-pass: 50 ÷ 220 Hz @ 24 dB/Oct.

Size

BxLxH mm	216x470x56
BxLxH inches	8" 1/2 x 18" 1/2 x 2" 1/4
Weight (kg/lb)	4,65 / 10.25